




Φ25 混合水阀芯 MIXER CARTRIDGE FLAT REF.25A1 平脚

NSF61

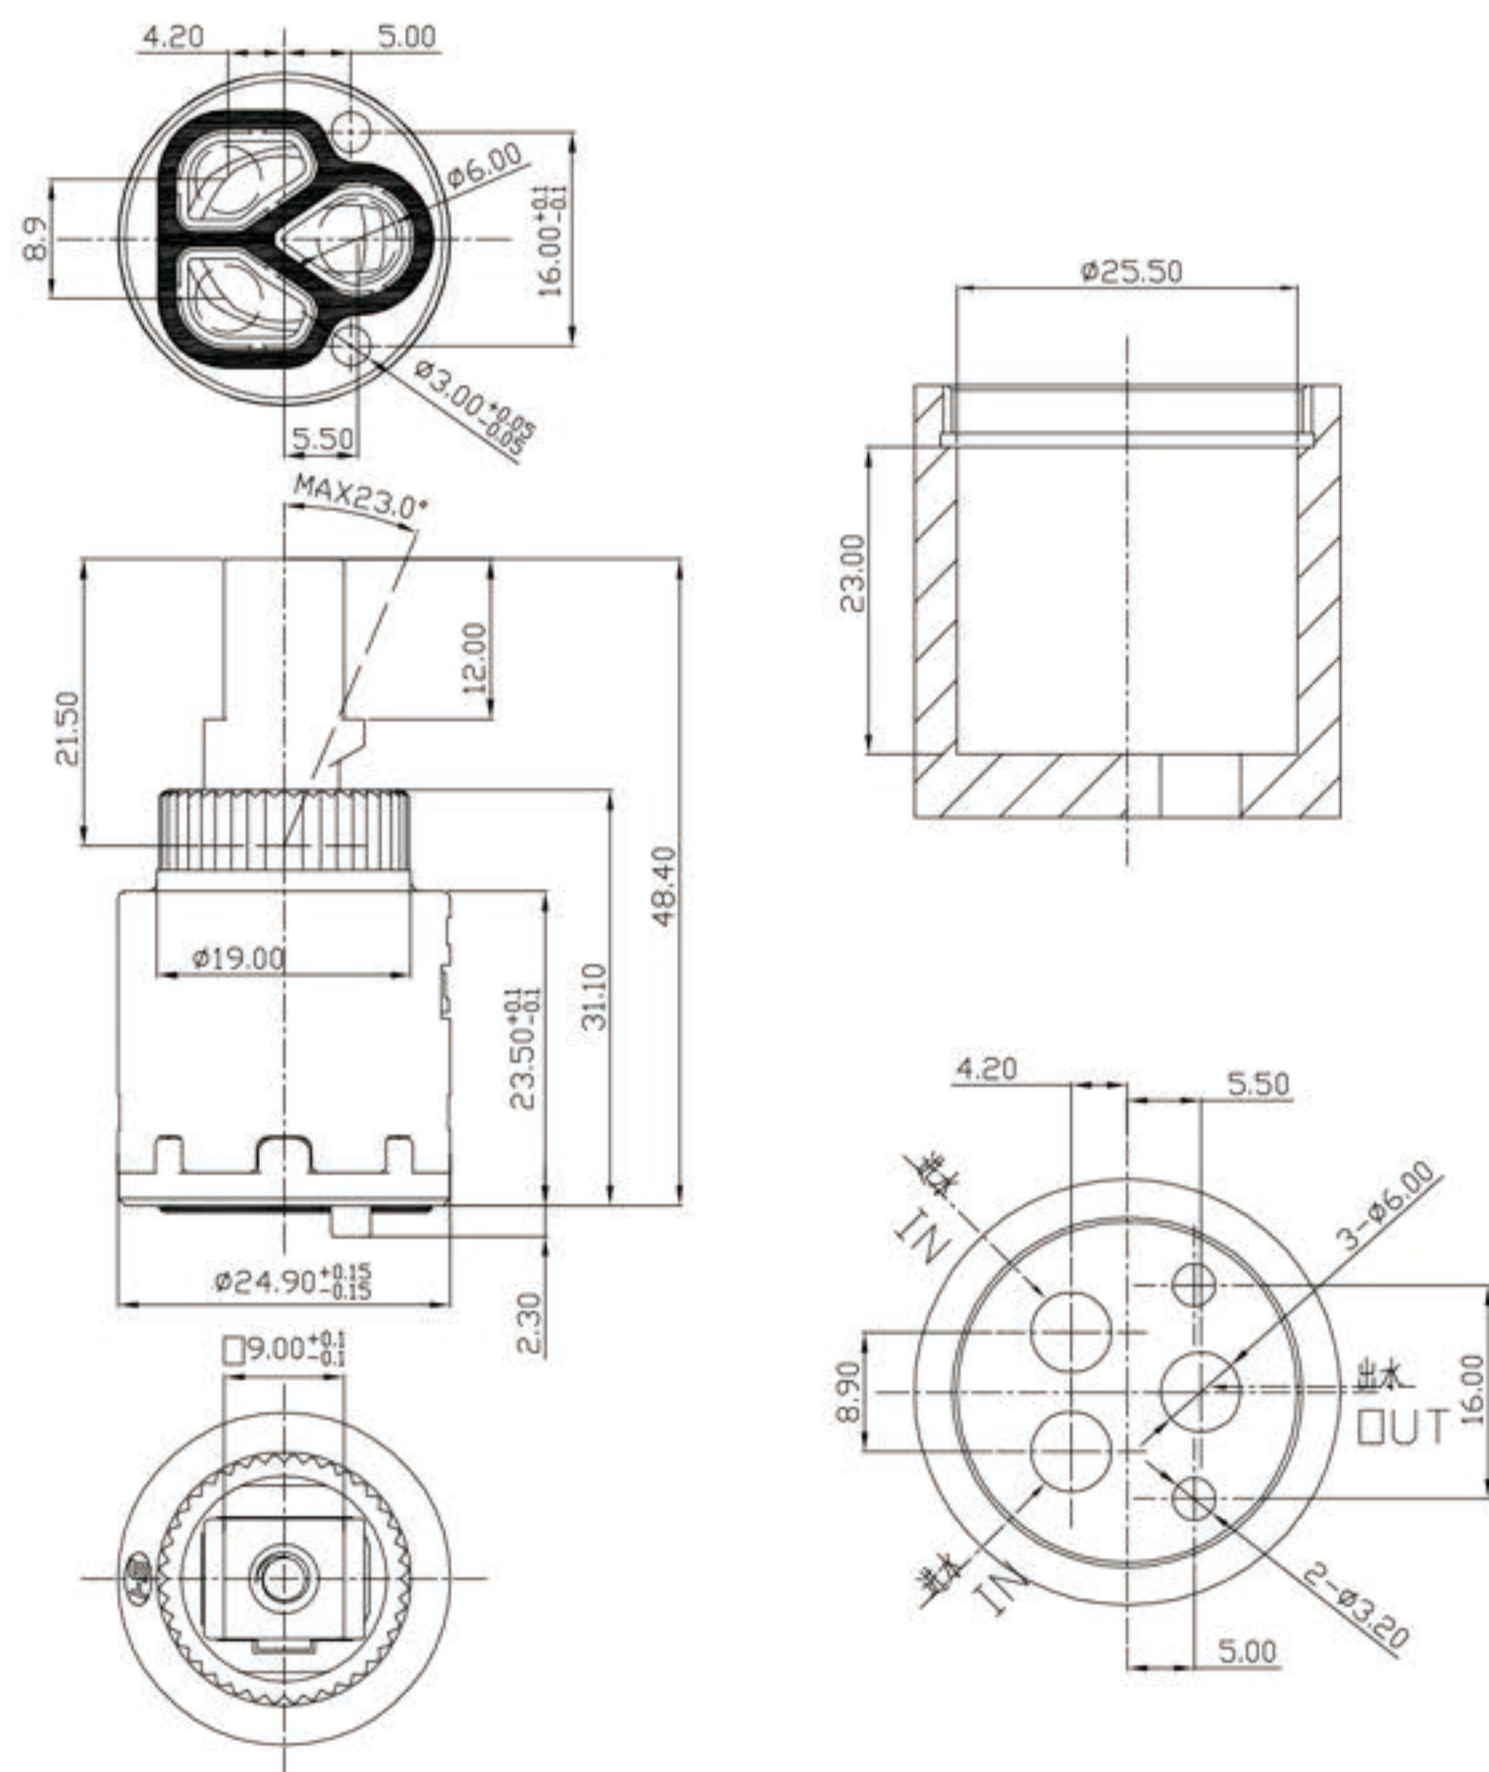

MIXER CARTRIDGE 混合水阀芯



技术参数 TECHNICAL DATA

最大旋转角度 Max.Mixing Angle	90°	压紧螺母扭矩 Locking Torque Force	8-10N.m	灵敏度 Sensitivity	≥ 12°
开关旋转扭矩 Opening Torque Force	0.25-0.35N.m	拨杆破坏扭矩 Lever Breaking Torque	≥ 8N.m	陶瓷片 / Ceramic Disc	
使用温度 Temperature	4-90℃	使用寿命测试 Lifetime Test	GB18145 > 70,000m 周期 ASME > 500,000m 周期 Min.70,000 cycles(GB18145) ASME Min.500,000 cycles	硬度 Hardness	≥ 1100Hv5
最大开启角度 Max.Opening Angle	23°	爆破测试 Bursting Test	静水压 2.5MPa, 阀芯无变形、破裂。 Static water pressure at Max2.5MPa, no deformation or breakage.	平面度 Flatness	≤ 0.3 μm
				粗糙度 Roughness	≤ Ra0.2 μm

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升/分钟) Flow Rate(L/min)	5.7	7.8	9.5	10.7	12	13.3	14.3	15.3	16	17

流量分析图 / Flow Rate Chart

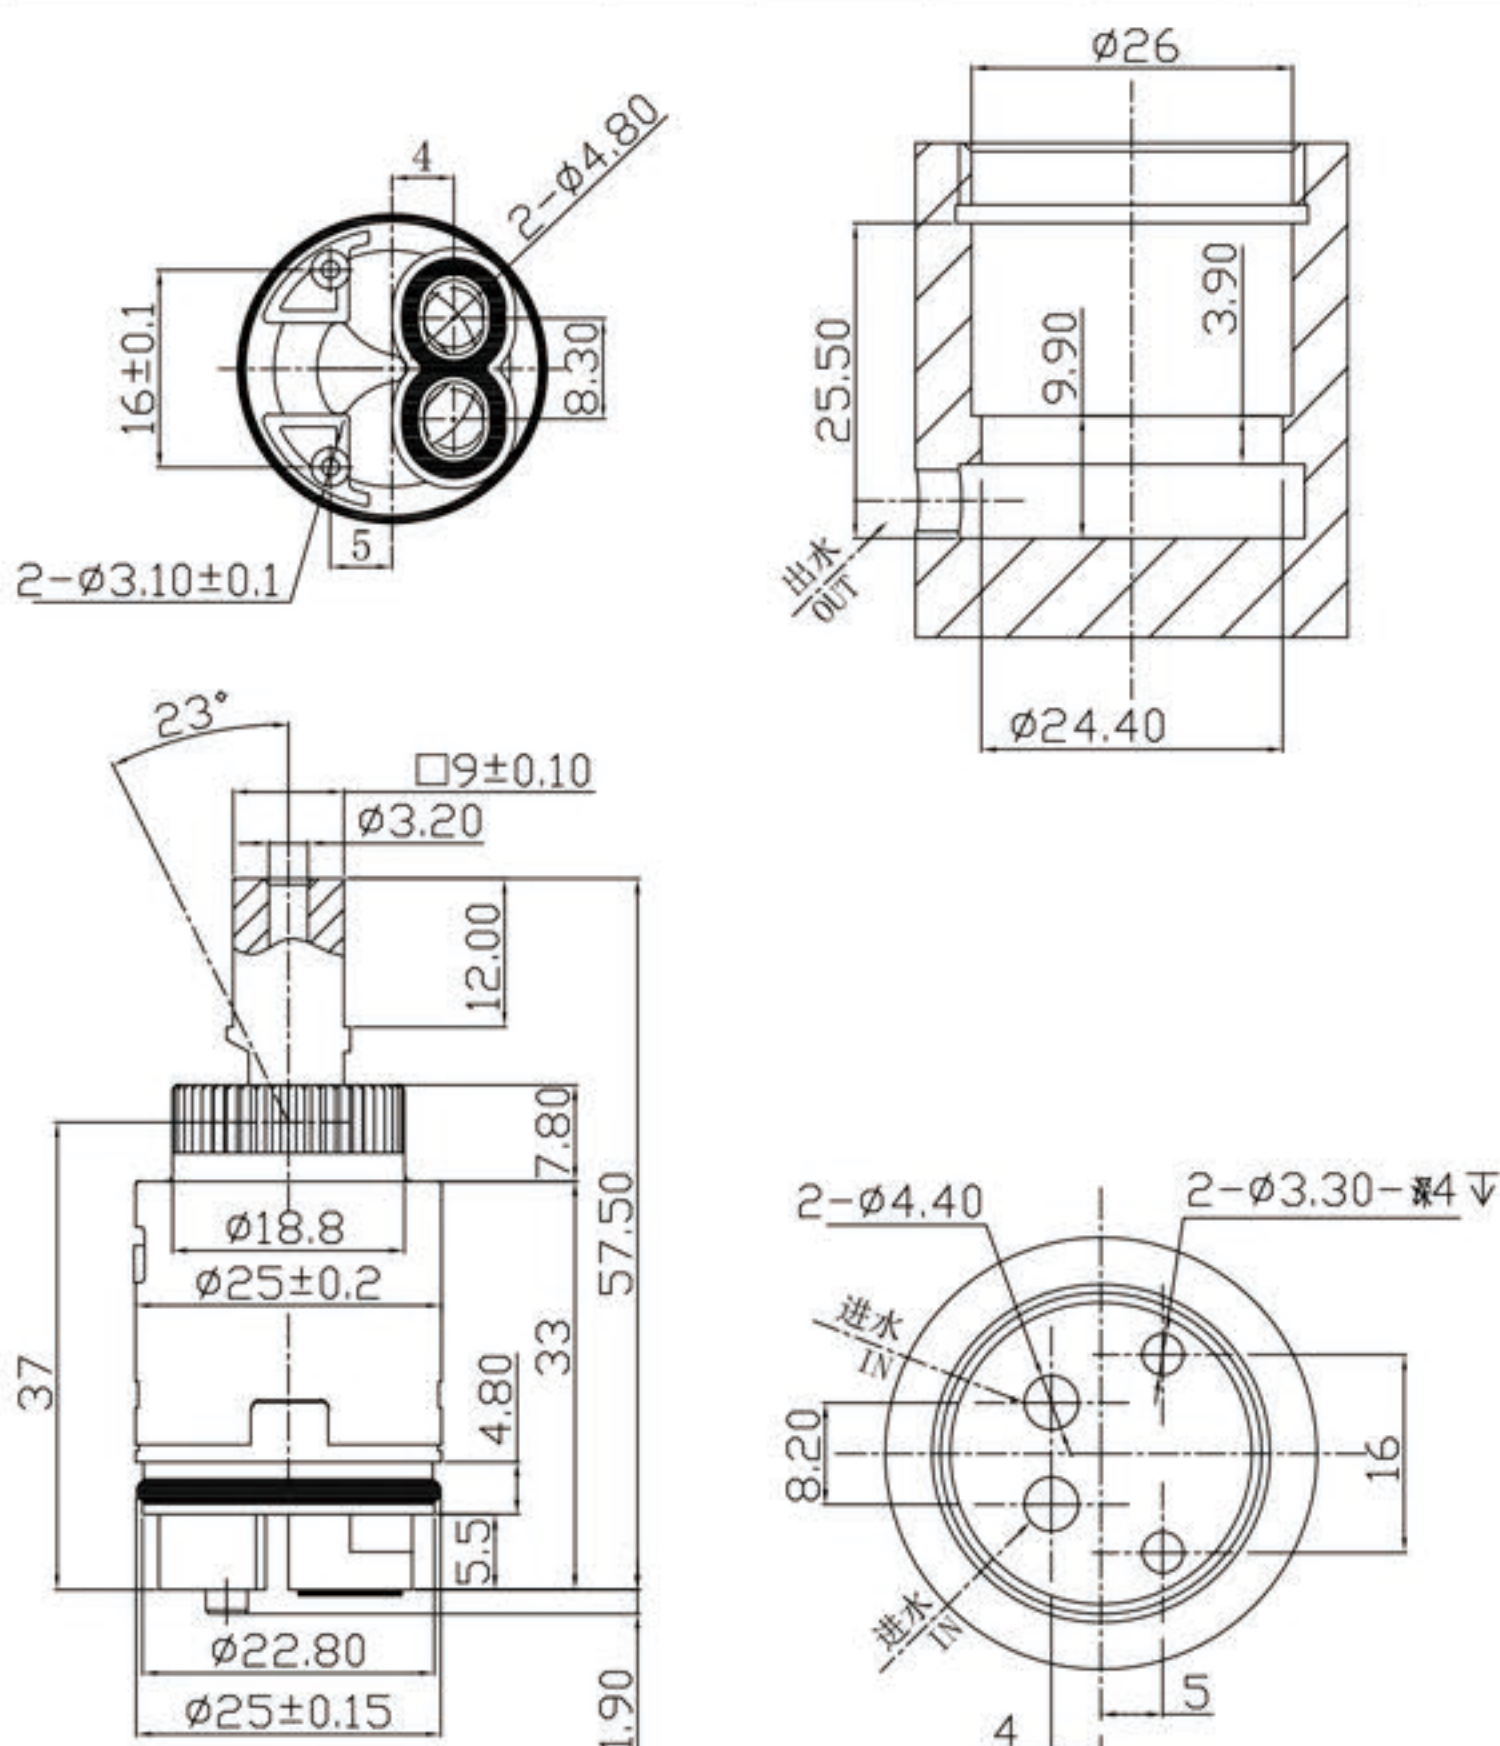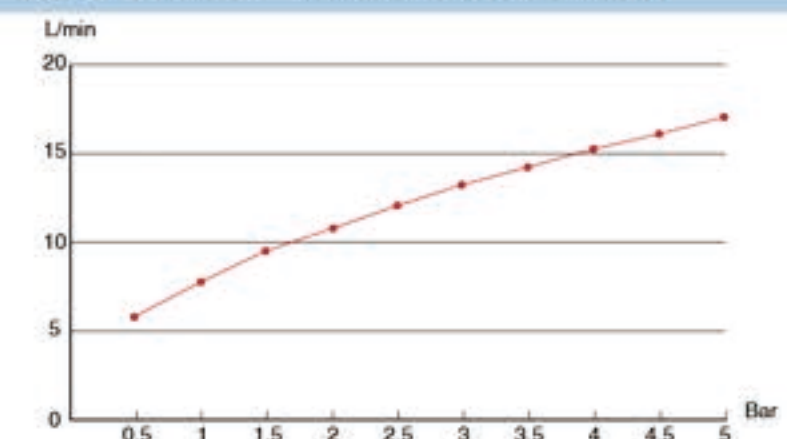

Φ25 混合水阀芯 MIXER CARTRIDGE WITH DISTRIBUTOR REF.25B 高脚

NSF61

