

Φ31


二分水阀芯

TWO FUNCTIONS DIVERTER CARTRIDGE
WITH STOP FUNCTION

REF.31T20014-D 带停水



CE ACS

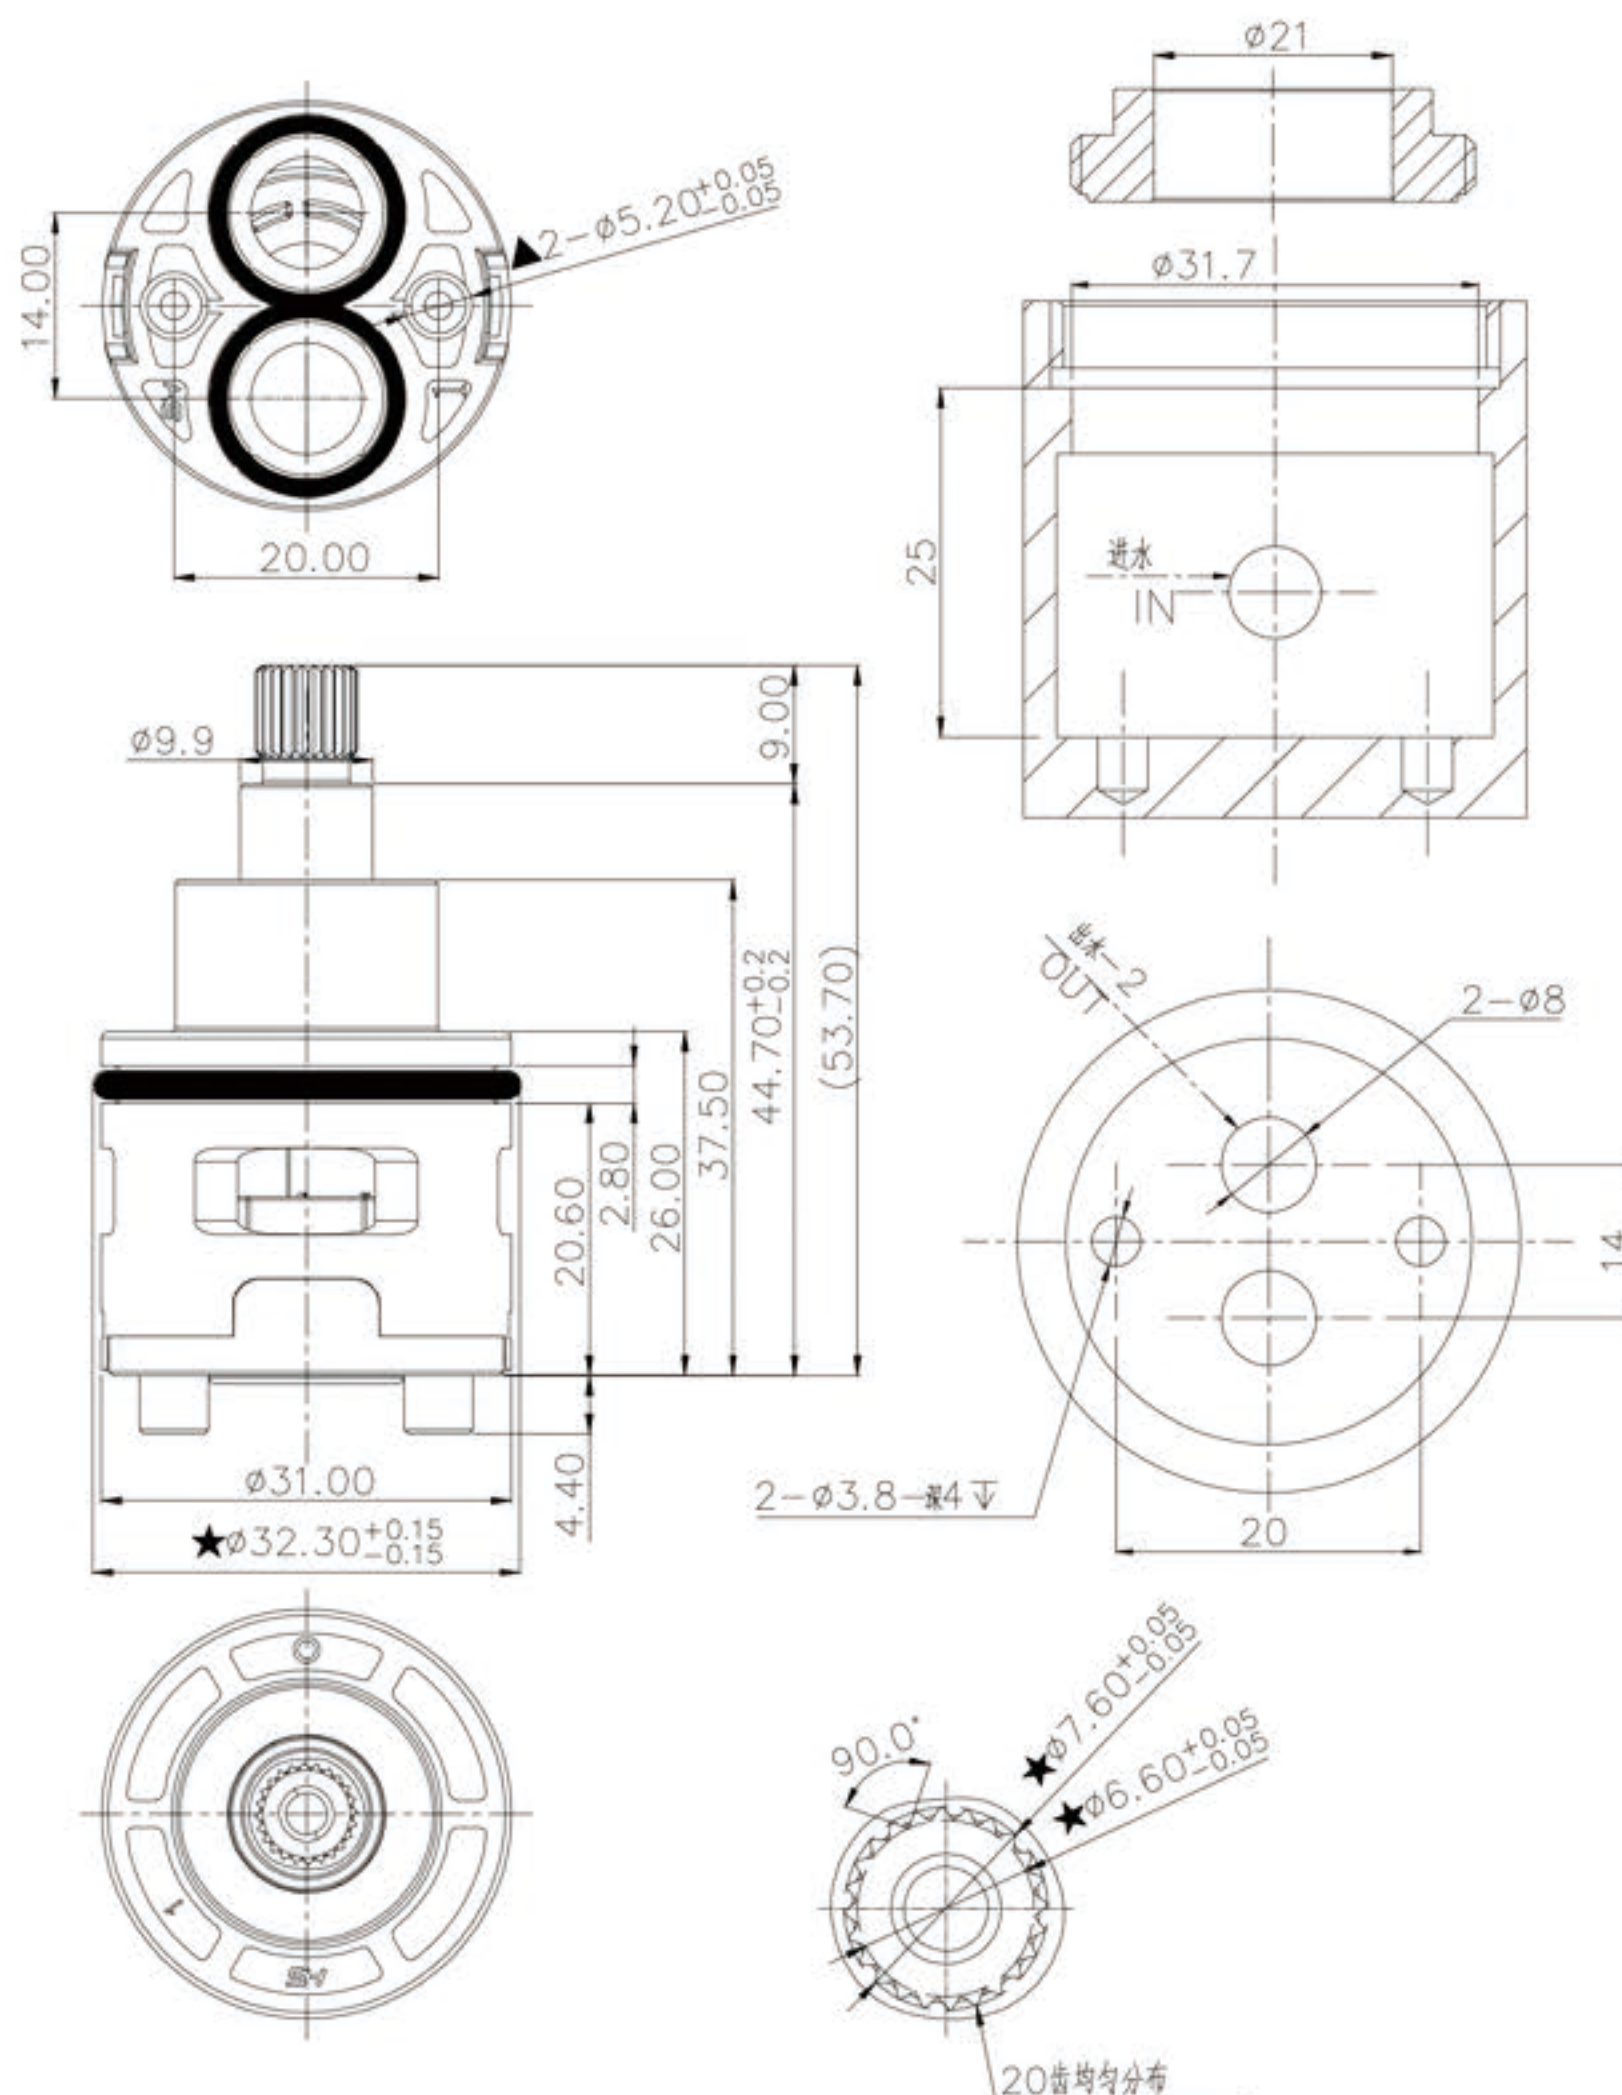

技术参数 / Technical Data

旋转角度 Turning Angle	180°
开关旋转扭矩 Turning Torque Force	< 0.3N.m
使用温度 Temperature	4~90℃
压紧螺母扭矩 Locking Torque Force	8~10N.m

拨杆破坏扭矩 Lever Breaking Torque	≥ 6N.m
使用寿命测试 Lifetime Test	GB18145 > 70, 000 循环开关 > 70,000 open and close cycles.(GB18145)
爆破测试 Bursting Test	静水压 > 2.5MPa, 阀芯无变形、破裂。 Static water pressure at > 2.5MPa, no deformation or breakage.

陶瓷片 / Ceramic Disc

硬度 Hardness	≥ 1100Hv5
平面度 Flatness	≤ 0.3 μm
粗糙度 Roughness	≤ Ra0.2 μm

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升 / 分钟) Flow Rate(L/min)	9.5	12.8	15.9	18.1	20.2	22.1	24	25.5	27	28.5

流量分析图 / Flow Rate Chart

