


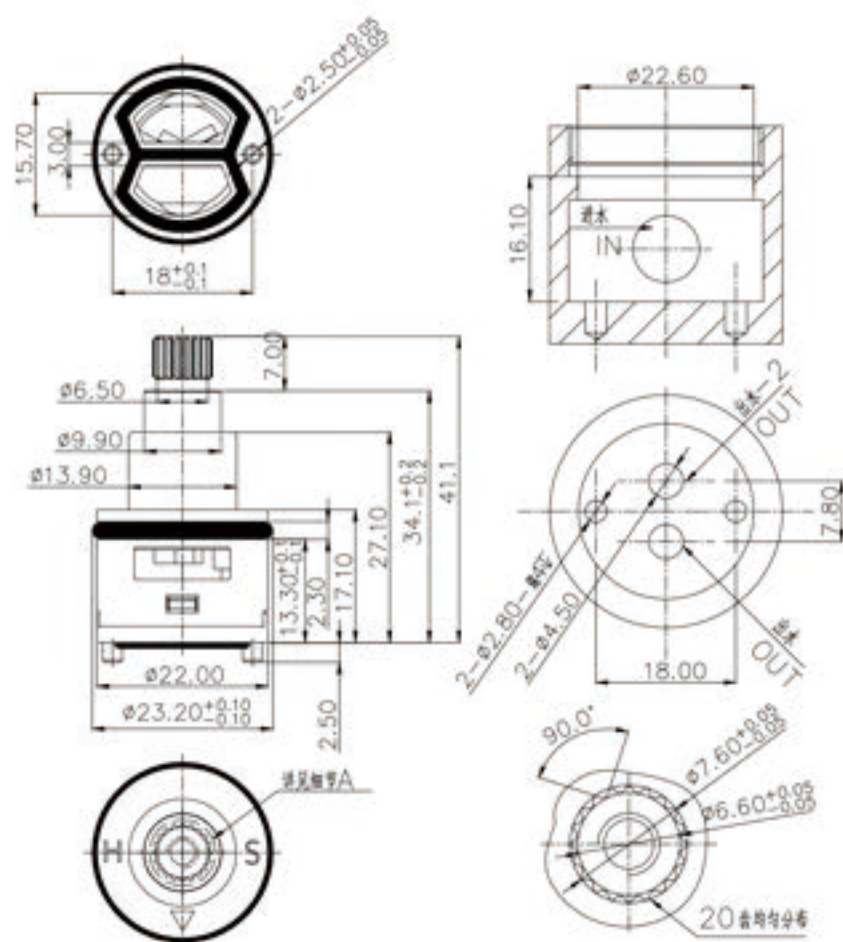

Φ22 二分水阀芯

TWO FUNCTIONS
DIVERTER CARTRIDGE


REF.8101-D

CE ACS KTW

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升/分钟) Flow Rate(L/min)	11.3	15.5	18.9	21.7	23.8	26	28.1	30.2	32.1	33.7

流量分析图 / Flow Rate Chart

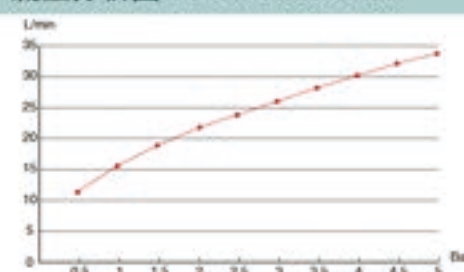


技术参数

旋转角度 Turning Angle	90° / 120° / 180°	拨杆破坏扭矩 Lever Breaking Torque	≥ 6N.m
开关旋转扭矩 Turning Torque Force	< 0.3N.m	使用寿命测试 Lifetime Test	GB18145 > 30, 000 循环开关 > 30,000 open and close cycles.(GB18145)
使用温度 Temperature	4~90℃	爆破测试 Bursting Test	静水压 1.6MPa, 阀芯无变形、破裂。 Static water pressure at Max1.6MPa, no deformation or breakage.
压紧螺母扭矩 Locking Torque Force	6~8N.m		

陶瓷片 / Ceramic Disc

硬度 Hardness	≥ 1100Hv5
平面度 Flatness	≤ 0.3μm
粗糙度 Roughness	≤ Ra0.2μm

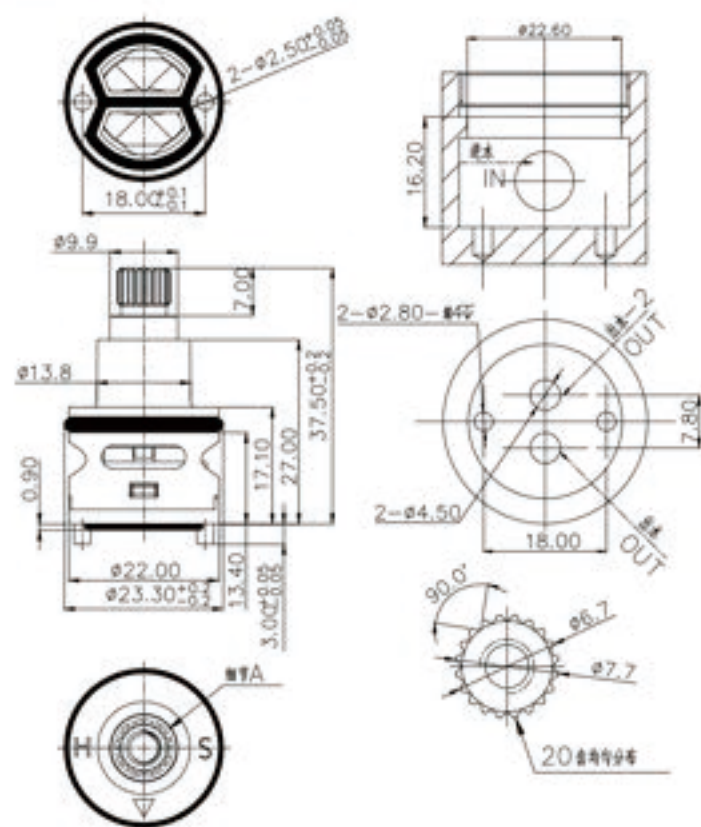

Φ22 二分水阀芯

TWO FUNCTIONS DIVERTER
CARTRIDGE WITH STOP FUNCTION

REF.8902-D 带停水

CE ACS KTW

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升/分钟) Flow Rate(L/min)	8	10.3	12.6	14.3	16.3	18.3	19.4	20.4	21.1	22.4

流量分析图 / Flow Rate Chart

