


Φ35

BUTTON CARTRIDGE

按压开关 + 调温阀芯

ON/OFF+TEMPERATURE CONTROLLING

REF.HSP-012

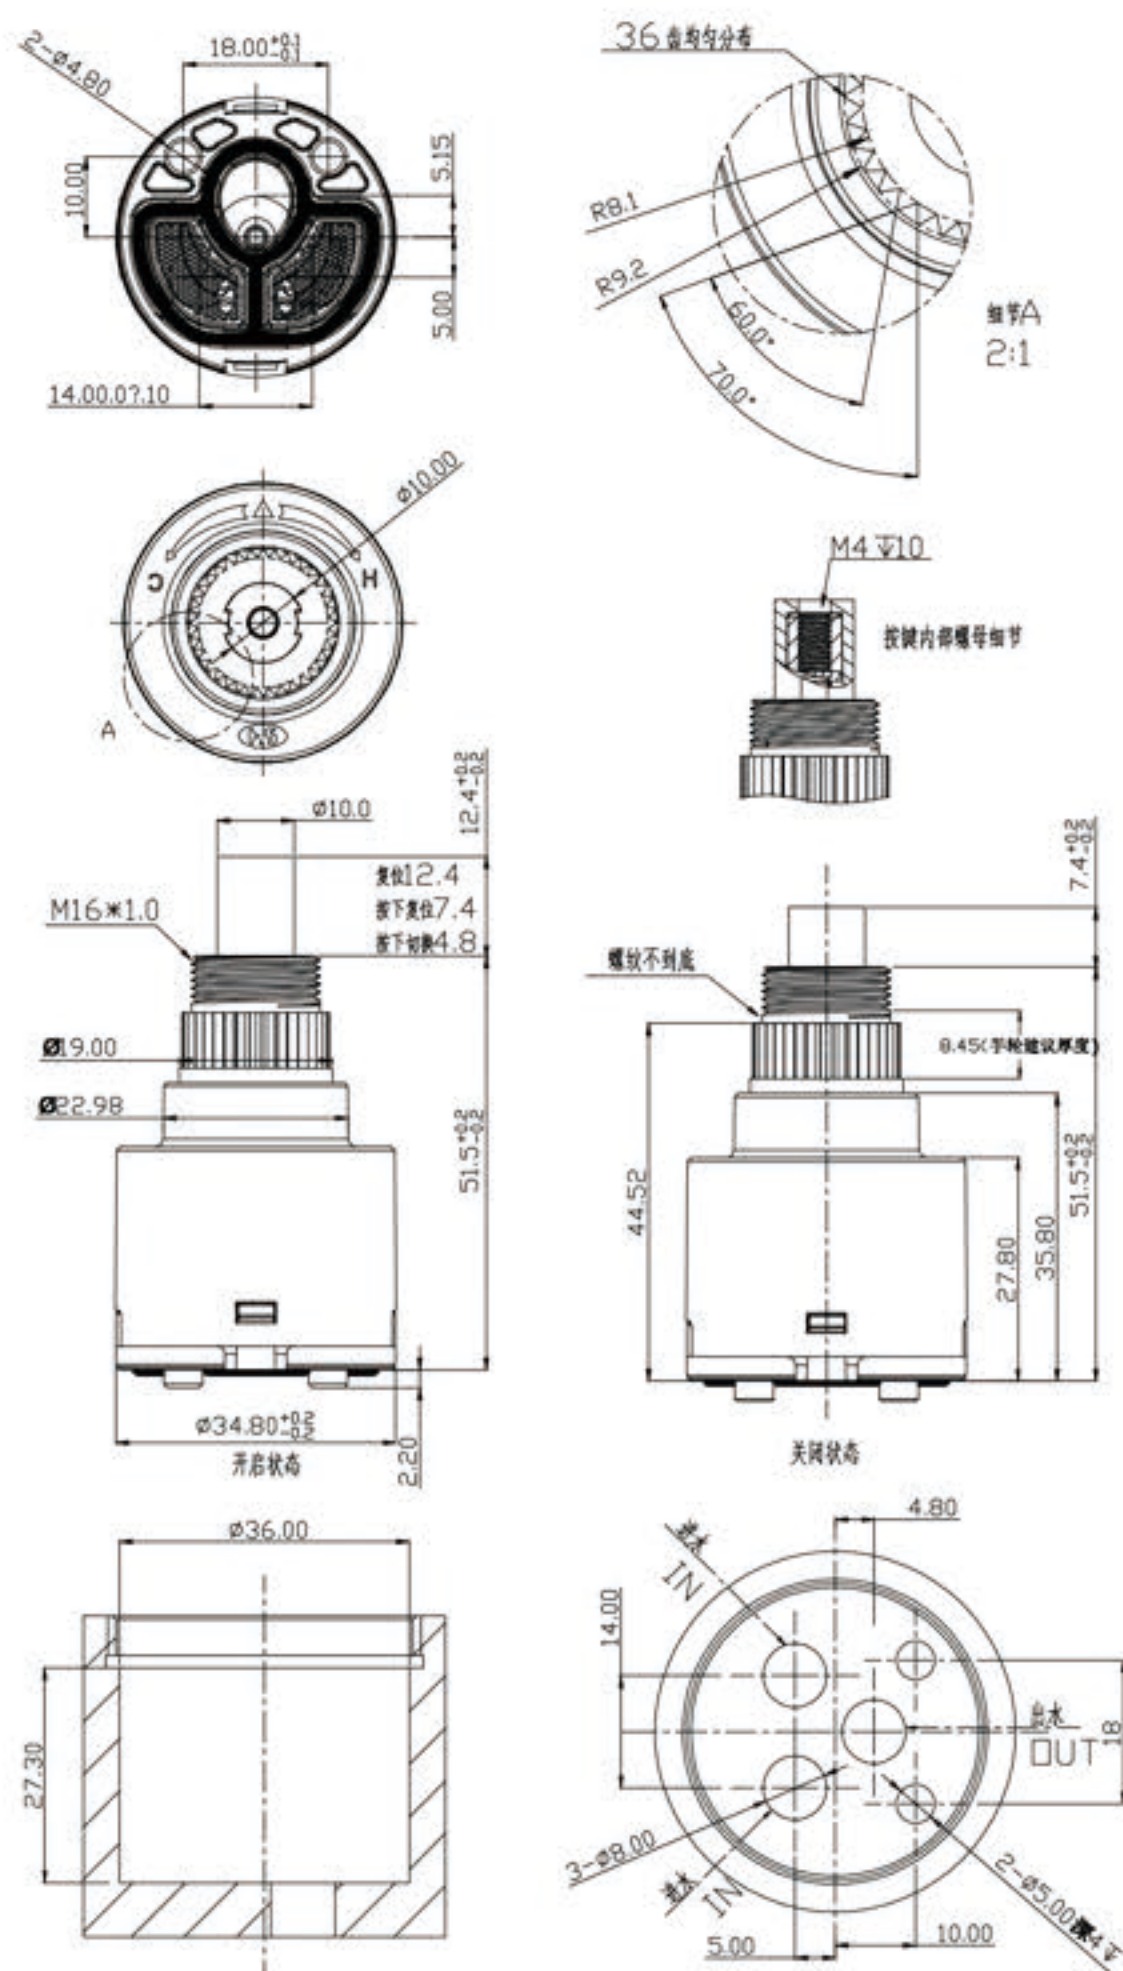

NSF61 ACS



技术参数 / Technical Data

连接螺纹 Connection Thread	M16×1.0 < 3N.m
旋转角度 Turning Angle	100°
使用温度 Temperature	4~90℃
压紧螺母扭矩 Locking Torque Force	8~10N.m
拨杆破坏扭矩 Lever Breaking Torque	3N.m

调温旋转扭矩 Switching Torque Force	< 0.3N.m
按键开关力度 Button Pressing Force	0.8~1.2N.m
使用寿命测试 Lifetime Test	GB18145 > 200, 000 循环开关 > 200,000 open and close cycles.(GB18145)
爆破测试 Bursting Test	静水压 2.5MPa, 阀芯无变形、破裂。 Static water pressure at Max2.5MPa, no deformation or breakage.

灵敏度 Sensitivity	≥ 12°
--------------------	-------

陶瓷片 / Ceramic Disc

硬度 Hardness	≥ 1100Hv5
平面度 Flatness	≤ 0.3μm
粗糙度 Roughness	≤ Ra0.2μm

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升 / 分钟) Flow Rate(L/min)	9.4	13.3	16.6	19.7	21.9	24	26.2	28	29.8	31.5

流量分析图 / Flow Rate Chart

