

Φ28

BUTTON CARTRIDGE


按压开关阀芯

ON/OFF

REF.HSP-011



NSF61 ACS

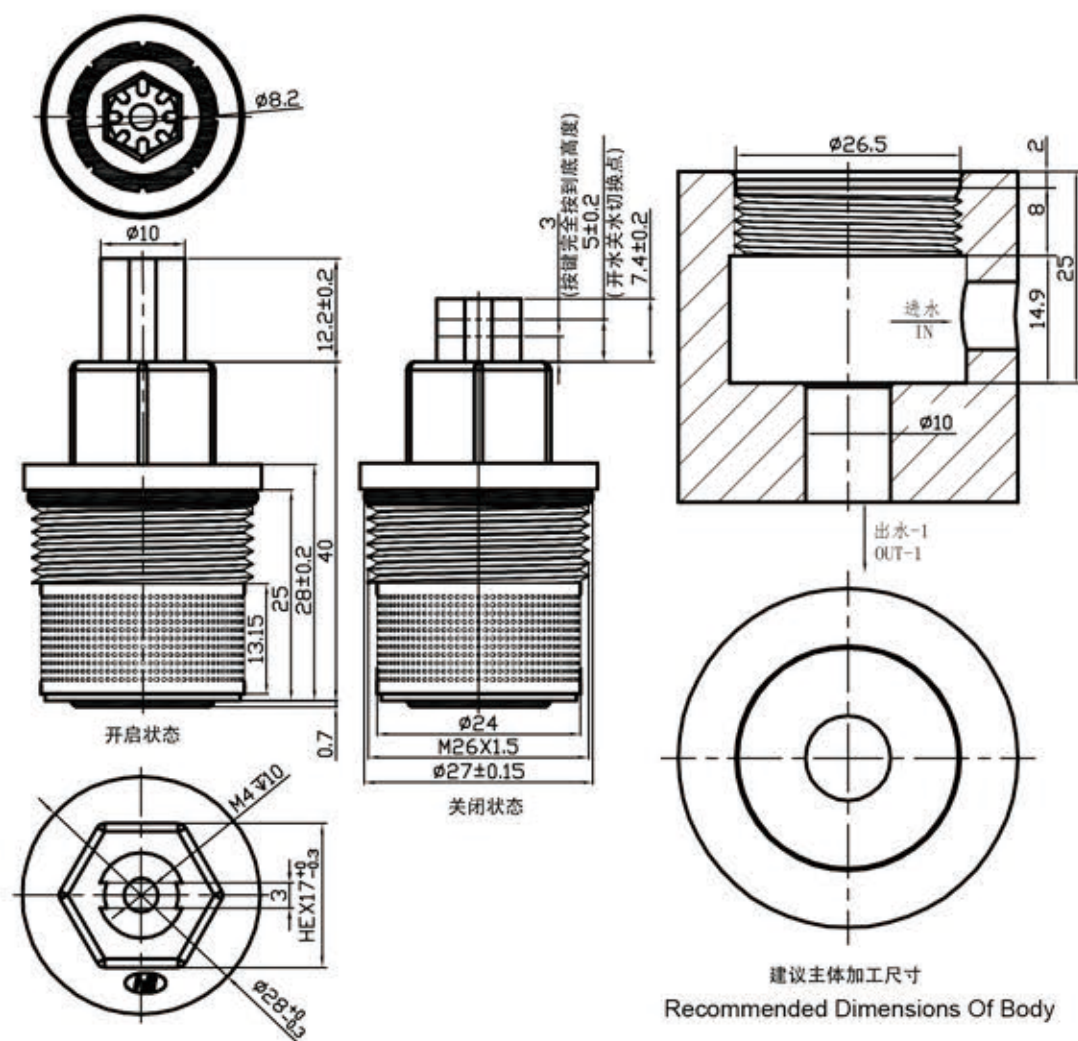


技术参数 TECHNICAL DATA

使用温度 Temperature	4~90℃	按键力度 Button Pressing Force	10~12N	使用寿命测试 Lifetime Test	GB18145 > 200,000m 周期 Min.200,000 cycles(GB18145)
螺纹锁紧扭矩 Locking Torque Force	6~8N.m	拨杆破坏扭矩 Lever Breaking Torque	3N.m	爆破测试 Bursting Test	静水压 2.5MPa, 阀芯无变形、破裂。 Static water pressure at Max2.5MPa, no deformation or breakage.

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升/分钟) Flow Rate(L/min)	10	15	21.3	24.2	26.7	29	30.8	31.5	34	35.5

流量分析图 / Flow Rate Chart

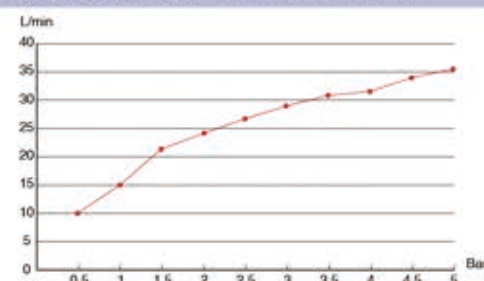

Φ28

BUTTON CARTRIDGE

反向按压开关阀芯

ON/OFF REVERSE

REF.HSP-021



NSF61 ACS

