


Φ30

BUTTON CARTRIDGE

按压底进底出分水阀芯
ON/OFF BOTTOM IN BOTTOM OUT DIVERTER

REF.HSP-301

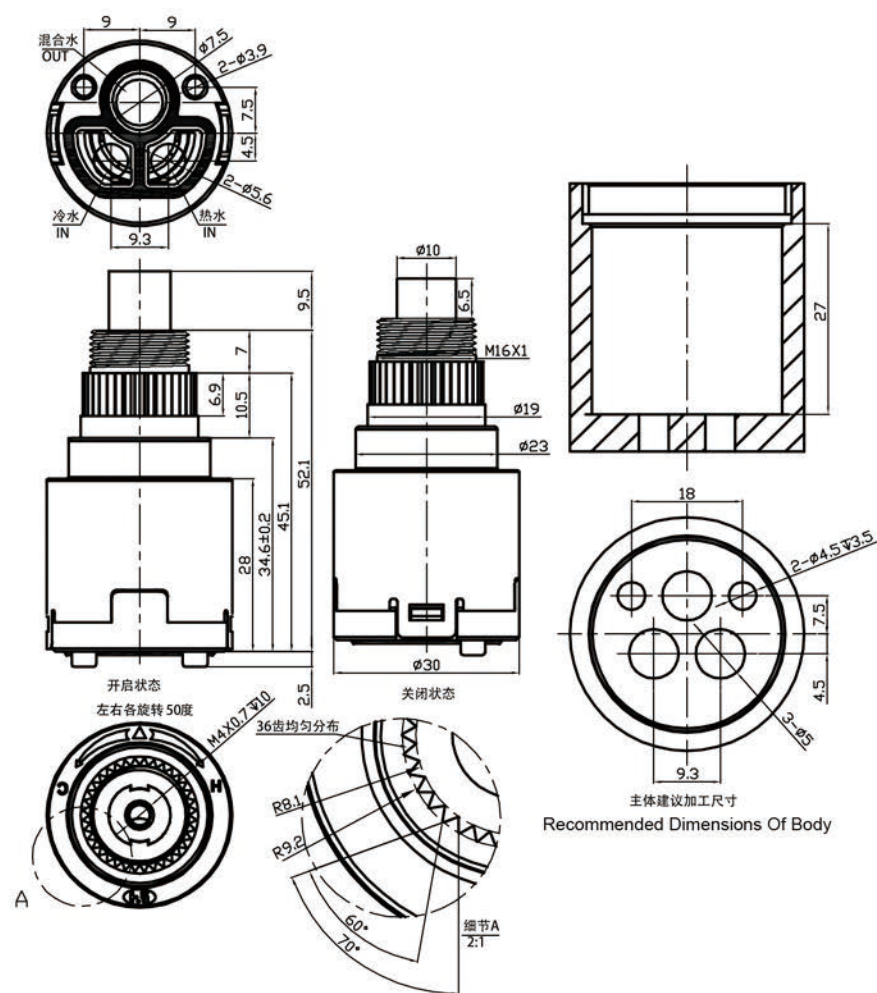

NSF61 ACS



技术参数 / Technical Data

连接螺纹
Connection Thread

M16×1 < 2N.m

使用温度
Temperature

4~90℃

压紧螺母扭矩
Locking Torque Force

6~8N.m

拨杆破坏扭矩
Lever Breaking Torque

3N.m

按键力度
Button Pressing Force

10~12N

调流量旋转扭矩
Adjust Flow Rotational Torque

< 0.3N.m

旋转分水使用寿命测试
Rotary Diverter Lifetime Test

GB18145 > 30, 000m 周期
Min.30,000 cycles(GB18145)

按键使用寿命测试
Button Lifetime Test

GB18145 > 200, 000m 周期
Min.200,000 cycles(GB18145)

爆破测试
Bursting Test

静水压 < 2.5MPa, 阀芯无变形、破裂。
Static water pressure at < 2.5MPa,
no deformation or breakage.

陶瓷片 / Ceramic Disc

硬度
Hardness

≥ 1100Hv5

平面度
Flatness

≤ 0.3 μm

粗糙度
Roughness

≤ Ra0.2 μm

流量测试 / Flow Rate Test

压力 (巴) Pressure (Bar)		0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
流量 (升 / 分钟) Flow Rate(L/min)	单边	7.5	10.3	12.4	14.2	15.8	17.3	18.6	20	21.2	22.2
	双边	7.7	11.1	13.6	15.8	17.6	19.1	20.8	22.3	23.7	25

流量分析图 / Flow Rate Chart

